

The BioCompact II 410 is available as a refrigerator or freezer in either white or stainless steel finish. Choose between well-insulated glass door with light or solid door.



## BioCompact II 410

The **BioCompact II 410** is a large refrigerator or freezer cabinet with a small footprint, designed for a wide range of biostorage purposes where the prime focus is on dependability and exceptional performance.

The **BioCompact II 410** provides you with significantly better performance than any other cabinets in this segment, on account of a refrigeration system that does away with cold walls that can damage the contents and a unique air distribution system for storing ordinary biomaterial under consistent, stable conditions.

The design of the **BioCompact II 410** ensures you lots of ways to deal with individual storage needs, thanks to the versatile interior layout and a comprehensive selection of fixtures and fittings. The small footprint of this design also makes it the perfect biostorage unit for use in confined spaces.

The **BioCompact II 410** uses environmentally responsible HFC-free foam propellants and is available with CFC-free or HFC-free refrigerants. Based on decades of specialist know-how, these biostorage units are exceptionally energy-efficient, and are the best performers on the market in relation to Scandinavian standards.

Available in either white or stainless steel finish, with a one-piece moulded ABS inner lining. Shelves and drawers are mounted in U-shaped rails moulded into the plastic walls.



BioCompact II RR410.  
Drawers and glass door are optional extras.



Biostorage you can depend on


**Gram Commercial A/S**  
Aage Grams Vej 1  
DK- 6500 Vejens  
Tel: +45 73 20 13 00  
Fax: +45 73 20 12 01  
info@gram-bioline.com  
[www.gram-bioline.com](http://www.gram-bioline.com)

### Top panel with BioLine control unit

The MPC unit is specially developed for users of BioLine storage cabinets. Among its many features are acoustic temperature and door alarms, and a voltage-free connector (NC/NO) for remote alarms. The display can be locked. An integrated Gram monitor, for providing documentation for the conditions within the cabinet, is available as an option.



## BioCompact II 410

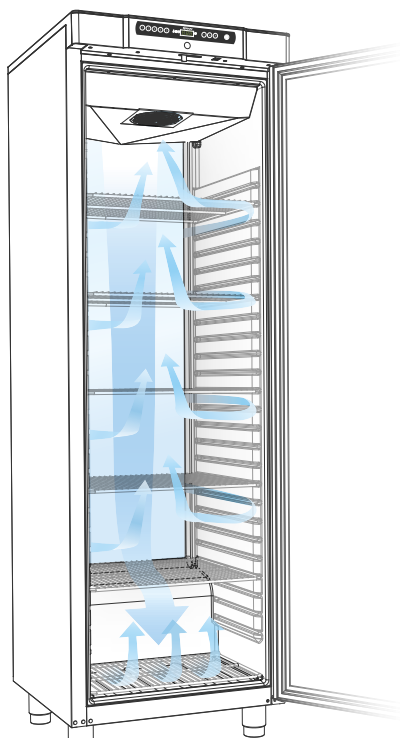

### Access port

24.5 mm port for ease of access, e.g. sensors for external temperature surveillance.

### E-Sensor

Extra sensor for providing a temperature reference within the storage compartment.

### Finned tube evaporator

Using a refrigeration system based on a finned tube evaporator is unique for biostorage products in this segment, and provides unparalleled benefits. The design results in a refrigerated storage space with no cold walls that can damage any delicate items stored in the cabinet. This also makes it possible to ensure even better temperature stability inside the cabinet.

Technical specifications	BioCompact II RR410	BioCompact II RF410
Temperature range	2/15 °C	-5/-25 °C
Ambient temperature range	Solid door 10/35 °C; glass door (RR) 10/32 °C	
Control Unit	Gram BioLine MPC 4.6, voltage-free contact, E-sensor, acoustic door and temperature alarms that can be programmed individually, alarm recording, hi/low temperature, and calibration function.	
Material interior	ABS lining	
Material exterior	Lacquered steel or stainless steel finish	
Dimensions mm (W x D x H)	595 x 640 x 1875	
Gross volume	346 litres/12.3 cubic feet	
Net volume	312 litres/11.1 cubic feet	
Modules for shelves and drawers	25 shelves, 13 drawers and 5 wire baskets	
Insulation	50 mm (cyclopentane)	
Refrigerant	R600a or R134a	
Base	Legs*	
Connection	230 V, 50 Hz	
Energy consumption	0.7 kWh/24h	1.6 kWh/24h
Noise level	35,1 dB(A)	38,6 dB(A)
Refrigeration capacity at -10 °C	R600a 207 Watt / R134a 226 Watt	-
Refrigeration capacity at -25 °C	-	R600a 175 Watt / R134a 195 Watt
Air system	Gram ventilated distribution system	
Defrost system	Smart defrost with automatic evaporation of defrost water	

\* The cabinets can be delivered with castors or legs or prepared for mounting on a plinth at no extra charge.

### Air distribution

The unique Gram air distribution system makes sure the temperature inside the cabinet remains stable at all times. With the finned tube evaporator placed in the top, there are no cold walls inside the cabinet.



### Shelves and drawers

A wide range of versatile interior fittings and layouts is available. The operating specifications and the interior layout can both be customised.

### Castors and legs - ABS inner lining

Wheels, legs or plinth-mounting are available at no extra charge for cabinets in the BioLine product range.